




Power over Ethernet (PoE)

For I-Series 2.0 for Android

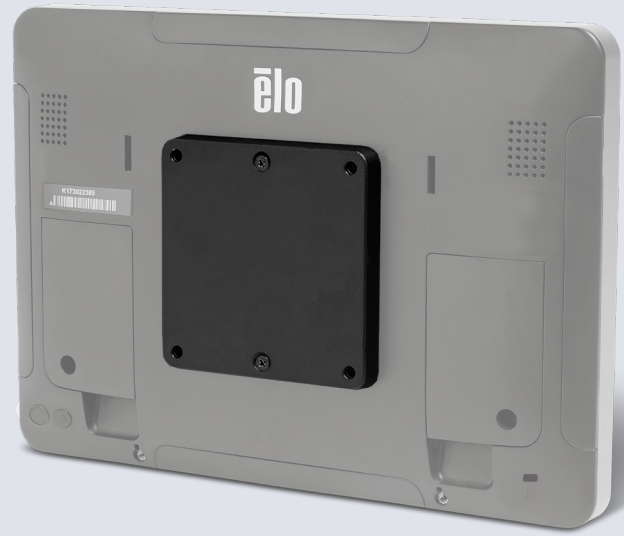

2-year warranty



Compatible with
I-Series 2.0 for Android



Power with POE

Product Overview

The Power-over-Ethernet (POE) module offers a convenient and cost effective way to deliver power to the I-Series 2.0 for Android. The module allows you to put a DC voltage onto specific pairs of the Ethernet cable so that devices connected to the network can use it as a power source. So instead of requiring a power drop which can be expensive, you can run a low voltage network to simplify installation of solutions for shelf signage and AV applications like conference room schedulers or AV control displays.

Power over Ethernet (PoE)

Specifications	
Color	Black
Compatibility	I-Series 2.0 for Android
POE Standard Protocols	IEEE802.3, 10BASE T/100BASE-T IEEE802.3u, 100BASE-TX, IEEE802.3at, Power over Ethernet
Input Connection	POE+ (30W) - Warning: Please do not use other types of PoE such as PoE (15.4W) or UPoE (65W)
Dimensions	3.5" x 3.5" x 0.8" / 89.2 mm x 89.2 mm x 20.5 mm
Shipping Dimensions	6.5" x 6.3" x 2.5" / 165 mm x 160 mm x 63.5 mm
Weight	Unpackaged - 0.35 lbs / 0.16 kgs Packaged - 0.70 lbs / 0.32 kgs
Temperature	Operating: 0°C to 40°C (32°F to 104°F) Storage: -20°C to 50°C (-4°F to 122°F)
Humidity (Non-Condensing)	Operating: 20% to 80% Storage: 5% to 95%
Regulatory Approvals and Declarations	POE Module only: UL/cUL (US), IC (Canada), CE (Europe), CB (International), VCCI (Japan), RCM (Australia) Tested with I-Series 2.0 for Android - FCC (US), China RoHS (China)
Mounting Options	Adding a spacer bracket will allow 100 mm x 100 mm VESA mounting. For more information about mounting, please review the User Manual and Quick Install Guide
What's in the Box	POE Device Quick Install Guide 2x M3 x 16mm screws 4x M4 x 18mm flat head screws 4x M4 x 18mm pan head screws 1x POE Spacer
Warranty	2 years

Available Features - When using the POE Module with the I-Series 2.0 for Android

	10.1 Value	15.6 Value	10.1 Standard	15.6 Standard	21.5 Standard
Micro SD Card	Available	Available	Available	Available	Not Available
Wi-Fi	Not Available	Not Available	Not Available	Not Available	Not Available
Bluetooth	Available	Available	Available	Available	Available
Camera	Not Available	Not Available	Available	Available	Not Available
Touch	Available	Available	Available	Available	Available
Audio	Available	Available	Available	Available	50% (user selectable)*
Ethernet	Available	Available	Available	Available	Available
USB Peripheral Ports	Not Available	Not Available	1 port (user selectable)**	1 port (user selectable)**	1 port (user selectable)**
USB 3.0 Type A	Available	Available	Not Available	Not Available	Not Available
HDMI Out	Not Available	Not Available	Not Available	Not Available	Not Available
GPIO	Available	Available	Available***	Available***	Available***

* Audio - if enabled, will be limited to 50% volume

** USB Peripheral Ports - 1 side peripheral port can be enabled

*** The 5V power pin is disabled when using PoE Note: when using PoE with the 21.5 i-series 2.0, brightness will be limited to 70%.

Ordering Information

Part Number	Part Description	Color	Availability
E615169	ELO-KIT-POE-ADAPTER	Black	Worldwide

To find out more about our extensive range of Elo touch solutions, go to elotouch.com, or call the office nearest you.

North America

Tel +1 408 597 8000
Fax +1 408 597 8050
elosales.na@elotouch.com

Europe

Tel +32 (0)16 70 45 00
Fax +32 (0)16 70 45 49
elosales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385
Fax +86 (21) 3329 1400
www.elotouch.com.cn

Latin America

Tel +52 55 2281 6958
elosales.latam@elotouch.com

Elo reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo and the Elo logo are either trademarks or registered trademarks of Elo Touch Solutions, Inc. All other trademarks are the property of their respective owners.

© 2018 Elo Touch Solutions, Inc. All rights reserved. 18051AES00108

