



## QMC Professional Display

- LH43QMCEPGCXXY (43")
- LH50QMCEPGCXXY (50")
- LH55QMCEBGCXXY (55")
- LH65QMCEBGCXXY (65")
- LH75QMCEBGCXXY (75")
- LH85QMCEBGCXXY (85")

### Top line key features / benefits

1. Stunning performance for businesses
2. Ultra slim depth to maximise space
3. Even Bezel delivers clean visuals
4. Centred VESA holes for secure mounting<sup>3</sup>
5. Dynamic Crystal Colour delivers lifelike colour expression
6. Lifelike shades of colour in powerful 4K UHD<sup>4</sup>
7. View clear images with Non-Glare Panels
8. Intuitive Home UI for convenient connectivity
9. Collaborate wirelessly with Smartview+<sup>5</sup>
10. Easy screen calibration with Smart Calibration<sup>6</sup>
11. Built-in Professional Modes for specific verticals
12. MagicINFO S10<sup>8</sup> helps deliver smooth playback
13. Environmental certifications<sup>9</sup> support everyday sustainability

### Key features & message hierarchy



### Slim design. Stunning performance.

Introducing QMC, the slimmest display in Samsung's Professional Display range. It brings elegance to business while maximising space. With built-in solutions and intuitive home screen UX, the QMC is easy to use and helps enable businesses in various verticals to achieve growth with its efficiency and design innovation.



### Maximum impact in minimum space

#### Ultra Slim Depth

The QMC's ultra-slim thickness of 28.5mm makes it the thinnest option in Samsung's UHD 4K series. Its sleek design and Slim Fit Wall Mount<sup>1</sup>, helps you optimise space and install it neatly in a wide range of business environments.

#### DISCLAIMERS

1. Slim Fit Wall Mount must be purchased separately.


## Additional features & message hierarchy



### Clean visuals in landscape or portrait mode

#### Even Bezel

The QMC's bezels are consistent and even on all four sides of the display, with the same thickness and dimensions. The new even bezel design<sup>2</sup> helps prevent visual issues from arising when the display is adjusted to portrait mode.

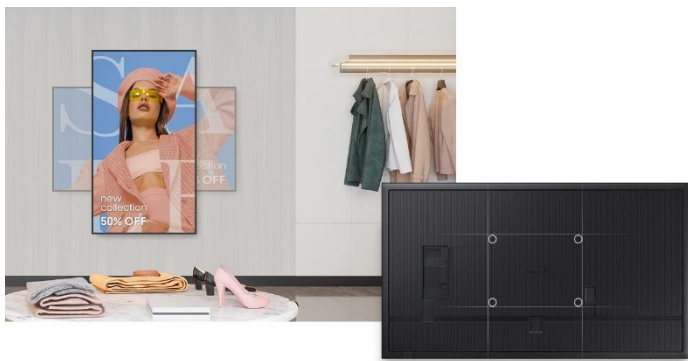

### Secure and even mounting

#### Centred VESA Holes<sup>3</sup>

The central positioning of the VESA holes on the back of the display helps evenly distribute its weight for secure mounting. With the VESA holes positioned in the centre, this helps prevent the display from tilting unintentionally when adjusted into portrait mode.



### Lifelike colour expression

#### Dynamic Crystal Colour

The QHC series features Dynamic Crystal Display, using 10 bit processing for vivid colour expression, allowing viewers to enjoy a wide spectrum of colours.



### View lifelike shades of colour in powerful 4K

#### Quantum Processor Lite 4K<sup>4</sup>

Intelligent UHD upscaling technology, made possible by Samsung's Quantum Processor Lite 4K, enables content developed at a lower resolution to be elevated to UHD-level quality. It also performs edge restoration and noise reduction to help optimise on-screen text and imagery.

#### DISCLAIMERS

- 1. Images simulated for illustrative purposes only.
- 2. When compared to Samsung's previous UHD signage models.
- 3. The position of the VESA holes may vary slightly by model.
- 4. Viewing experience may vary according to type of content and format. Picture quality of upscaled content varies depending on resolution of source content.

## Additional features & message hierarchy



### Clear visibility

#### Non-Glare

The QMC features non-glare panels that help provide visibility across a variety of environments. This helps allow businesses to deliver accurate information in various ambient lighting conditions.



### Connect with convenience

#### Home User Interface (UI)


The QMC series' home screen UI displays popular categories like Favourites, Sources and Settings on the same screen for convenience. The Favourites folder grants users quick, easy access to frequently used features.



### Collaborate between screens with wire-free speed

#### Smartview+<sup>5</sup>

SmartView+ enables wireless screen sharing without cable connections to assist with easy collaboration. Users can now enable the screen sharing functionality at the start of a meeting, allowing the meeting admin to quickly switch between screens with one click.

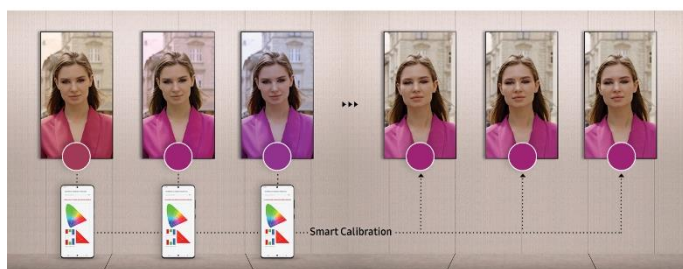

### Streamlined calibration between screens with mobile app

#### Smart Calibration<sup>6</sup>

Maintain brand consistency across every display in every location. Using the Samsung mobile app, Smart Calibration helps ensure every display is calibrated correctly, showcasing brand logos and other collateral in the exact colours required.

#### DISCLAIMERS

- Images simulated for illustrative purposes only.
- 5. Windows, Android and iOS are supported.
- 6. App is available for download via the Android Play Store. Solution is managed via direct Wi-Fi between display and mobile device.



## Additional features & message hierarchy



### Enhance professional environments with expert tools

#### Professional Modes

Built-in professional modes enable more possibilities in specific verticals. Director Mode minimises post-processing enhancements, helping to align content to the director's original intention. Medical teams can simulate medical images such as X-rays with DICOM Simulation Mode<sup>7</sup>, meeting DICOM's full greyscale standards.



### Smooth and virtually seamless content playback

#### MagicINFO S10 Player<sup>8</sup>

The embedded MagicINFO™ S10 player, backed by the powerful Tizen operating system, helps boost the overall performance of the display and offers painless management. This helps ensure seamless transitions and playback to deliver a better experience for both customers and store managers.



MagicINFO



Embedded media player



Remote management



### Everyday Sustainability

#### Energy Star, EPEAT and TÜV Rheinland Carbon Footprint Certification

Samsung is making diverse efforts to reduce our environmental impact in smart display, and encouraging users to pursue a more sustainable life. The QMC series has earned certifications for environmentally preferable products from highly recognised institutes in Germany and the U.S.<sup>9</sup>.

#### DISCLAIMERS

- Images simulated for illustrative purposes only.
- 7. DICOM: Digital Imaging and Communications in Medicine. Display provides a simulated experience and is not intended for diagnosis purposes.
- 8. MagicINFO licence sold separately.
- 9. QMC series has earned an ENERGY STAR 8.0 certification from the Environmental Protection Agency for its energy efficiency and an Electronic Product Environmental Assessment Tool (EPEAT) certification in recognition of its eco-conscious efforts, such as its recycled plastic use. QMC series is the first signage model to receive a product carbon footprint certification from TÜV Rheinland, a global testing body headquartered in Cologne, Germany. The organisation calculates its carbon footprint certification by evaluating the amount of greenhouse gases generated throughout the entire product lifecycle, ranging from production to disposal, based on internationally recognised standards. The certification status of TÜV Rheinland Carbon Footprint may vary depending on the display size.

## SPECIFICATIONS\*

Model Name	QM43C	QM50C	QM55C	QM65C	QM75C	QM85C
Model Code	LH43QMCEPGCXXY	LH50QMCEPGCXXY	LH55QMCEBGCXXY	LH65QMCEBGCXXY	LH75QMCEBGCXXY	LH85QMCEBGCXXY

Panel						
Diagonal Size (Class/Measured)	43" / 42.5"	50" / 48.5"	55" / 54.6"	65" / 64.5"	75" / 74.5"	85" / 84.5"
Panel Type	IPS	IPS	VA	VA	VA	VA
Resolution	3840x2160 (16:9)	3840x2160(16:9)	3840x2160(16:9)	3840x2160(16:9)	3840x2160(16:9)	3840x2160(16:9)
Haze	25%	25%	25%	25%	25%	25%
Brightness (Typ.)	500nit	500nit	500nit	500nit	500nit	500nit
Orientation	Landscape/Portrait	Landscape/Portrait	Landscape/Portrait	Landscape/Portrait	Landscape/Portrait	Landscape/Portrait
Contrast Ratio (Typ.)	4000:1 / 1200:1 (IPS)	4000:1 / 1200:1 (IPS)	4000:1	4000:1	4000:1	4000:1
Active Display Area	941.184 (H) x 529.416 (V)	1095.84(H) x 616.41(V)	1209.6(H) x 680.4(V)	1428.48 (H) x 803.52 (V)	1650.24 (H) x 928.26 (V)	1872.0 (H) x 1053.01(V)
Pixel Pitch (mm)	0.245x 0.245	0.285 x 0.285	0.315 x 0.315	0.372 x 0.372	0.429 x 0.429	0.487 x 0.487
Colour Gamut	72% (NTSC)%	72% (NTSC)%	72% (NTSC)%	72% (NTSC)%	72% (NTSC)%	72% (NTSC)%
Operation Time Support	24/7	24/7	24/7	24/7	24/7	24/7

Connectivity	
INPUT	DP 1.2 (1), HDMI 2.0 (3), USB 2.0 (2)
OUTPUT	Stereo Mini Jack
External Control	RS232C (in/out), RJ45 (in)
Speaker	10W 2ch

Power							
Power Supply	AC 100 - 240 V, 50/60 Hz						
Power Consumption	Max (W/h)	121	132	154	187	214.5	330
	Typical (W/h)	73	84	102	135	151	237
	Sleep Mode	Less than 0.5W					

Mechanical Spec							
Dimension (W)(H) (D)(mm)	Set	969.5 x 557.8 x 28.5	1124.1 x 644.8 x 28.5	1237.9 x 708.8 x 28.5	1456.8 x 831.9 x 28.5	1682.3 x 960.4 x 28.5	1904.3 x 1085.3 x 28.5
	Package	1093 x 667 x 126	1246 x 761 x 131	1403 x 835 x 148	1616 x 945 x 164	1839 x 1113 x 180	2077 x 1222 x 210
Weight (kg)	Set	8.8	11.8	15.7	21.2	33	41.4
	Package	11.3	14.9	19.9	28.6	42.8	53.4
VESA Mount (mm)		200 x 200	200 x 200	200 x 200	400 x 300	400 x 400	600 x 400
Bezel Width (mm)		11.5 (even)	11.5 (even)	11.5 (even)	11.5 (even)	13.4 (even)	13.9 (even)

Features		
Internal Player	Operating System	Tizen 7.0
	Processor	CA73 1.6GHz Quad-Core
	Storage (FDM)	16GB (10GB available)
Key	UHD Signage with Built-in MagicINFO S10, SSSP 10.0	
H/W	2nd Gen. B2B Design / Centre IR / Temperature Sensor / Ambient Sensor / Auto Level / Wi-Fi (2.4/5.0GHz dual) and Bluetooth	
S/W	Signage New Home / Workspace (Microsoft 371/VMWare/RDP) / Custom Home / Auto Source Switching & Recovery / DICOM Simulation Mode / Director Mode / SmartView+ / Upgradable Web-Engine / Tizen Enterprise Platform / Video Conference Solution / Smart Calibration	

Certification	
Safety	60950-1 / 62368-1
EMC	Class B
Environment	ENERGY STAR 8.0, EPEAT, TÜV Rheinland Carbon Footprint
IP Rating	IP5x
Security	802.1x (WPA2 Enterprise): EAP-TLS, EAP-TTLS, EAP-PEAP

Operating Condition	
Temperature	0°C~ 40°C
Relative Humidity	10- 80%, non-condensing %

Included	
Quick Setup Guide / Warranty Card / Power Cord / RS232C (IN) Gender / Remote Controller and Batteries	

Optional Accessories						
Stand	STN-L4355C	STN-L4355C	STN-L4355C	STN-L6585C	STN-L6585C	STN-L6585C
Mount	WMN-B50SC	WMN-B50SC	WMN-B50SC	WMN-B50SC	WMN-B50SC	N/A

### DISCLAIMERS

\*Specifications may be subject to change without prior notice.