

x5POS



reddot winner 2020



IP54 Whole Unit



Ultra-thin 10mm Panel



Wall Mount



VESA Mount

SEÑOR

Modern. Elegant. Award-Winning Design.

The x5POS series represents a stylish space-saving system that is both portable and multi-functional.

The sleek base arm is sturdy yet easily adjustable to suit many functional positions.

Easy peripherals installation

Plug and play accessories with modern USB ports.




Ultra-thin bezel

On-cell PCT that provides seamless viewing experience.



- Ergonomic dual hinge design to suit most applications.
- Foldable design for easy storage.

I/O Connector

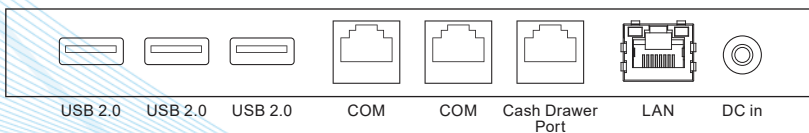


x5POS Standard Type

3 x USB | 2 x COM | 1 x Cash drawer port
1 x LAN

Optional Accessories



11.6" / 15.6" Customer Display with Accessories*




VFD Customer Display



Wireless + Bluetooth



2D Barcode Reader



MSR Reader



Printer



RFID / Fingerprint Reader



Mounting Options



VESA Mount



Wall Mount



Wall Mount with Printer

* Customer display with accessories is by special order only.



SPECIFICATIONS	x5C C38	x5C X35	x5C J64
PROCESSOR	Intel Celeron 3865U 1.8 GHz	Intel Core i3-7020U 2.3 GHz	Intel Celeron J6412 2.0 GHz (Turbo Boost up to 2.6 GHz)
SYSTEM MEMORY	4 GB DDR4 RAM	4 GB DDR4 RAM	4 GB DDR4 RAM
STORAGE DEVICE	M.2 SATA SSD	M.2 SATA SSD	M.2 SATA SSD

DISPLAY

SIZE / RESOLUTION	15.6" TFT LCD (LED backlight) / Full HD 1920 x 1080 pixels
BRIGHTNESS	300 cd/m ²
TOUCH SCREEN PANEL	On-cell projected capacitive touch (10mm ultra-thin panel)

I/O INTERFACE

USB PORT	5 x USB 2.0, 1 x USB 3.0 (side)
SERIAL PORT	2 x RJ50
AUDIO PORT	2 x built-in speakers / 2 x 2 W
CASH DRAWER	1 x RJ12 (24 V)
ETHERNET PORT	1 x RJ45 10/100/1000 Mbps

OPERATING SYSTEM

WINDOWS	10 IoT (64-bit) / 10 Pro (64-bit)
LINUX	Kernel 3.0 up

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	379 (W) x 232~431 (H) x 246 (D) mm 4.0 kg
CHASSIS MATERIAL	Aluminium die-cast & Polycarbonate-ABS
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	10% to 90% (non-condensing)
POWER CONSUMPTION	19 V / 3.15 A, external power adaptor, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED READERS	3-track MSR, Fingerprint reader, RFID (13.56 MHz), 2D image reader
CUSTOMER DISPLAY	11.6" / 15.6" FHD LCD or 2-line VFD
WIRELESS LAN	Integrated Dual Band Wi-Fi 802.11 b/g/n/ac (2x2 MIMO) + Bluetooth 4.1
COLOURS	Dark Grey (standard) White (optional)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
sales@senortech.com.au



Quality. Safety. Versatility.